

MHR20-750S SUBMERSIBLE OPTION



ATS 5200.477 Lic WMK22118


VALVE FEATURES

- Australian made changeover valve
- Easy to install
- Does not require regular maintenance
- MHR20 valve - solid brass construction
- No in-tank float required
- Mains pressure not limited
- Certified dual check valve for backflow prevention


CONSTRUCTION

- Pump casing: Stainless steel AISI 304
- Motor shaft: Stainless steel AISI 304
- Impellers: Technopolymer
- Diffuser: Technopolymer
- Double mechanical seal:
silicon carbide – graphite / ceramic – graphite
- Motor IP68
- Cooled motor (by water) of Class F
and thermal protection
- Electric power cable HO7RN 5m with 3 pin

Installation Guide

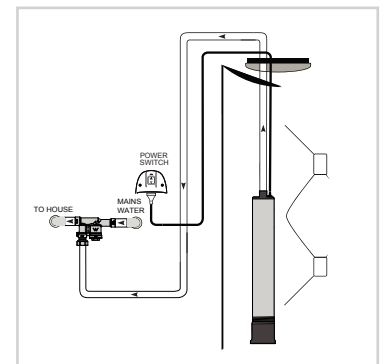

PERFORMANCE

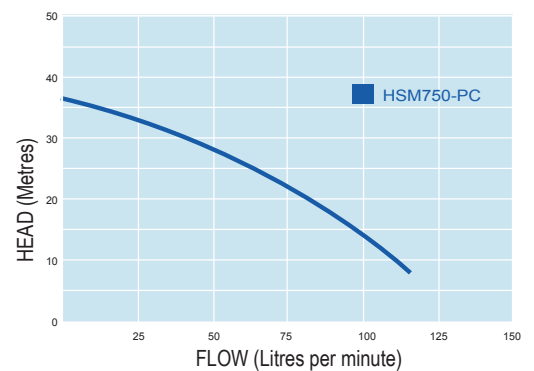

TECHNICAL DATA

Model	POWER		MAX. FLOW (L/min)	MAX. HEAD (m)	Outlets	STOREY Suitable for:	CONNECTION	
	(kW)	(HP)					Outlet (mm)	Mains Inlet
MHR20-750S	0.75	1	115	36	4	Single & Double	3/4" (F)	3/4" (F)